scanomat

Pre-Installation Guide TopBrewer Pro



Contents TopBrewer Pro




Overview	3
Cupboard Dimensions	4
Ventilation	5
Benchtop Cut-outs	6
Drip tray, countersunk	8
Drip tray, top-mounted	9
Checklist	10

Overview TopBrewer Pro



The diagram to the right is a visual example of a completed installation inside the cupboard for an ideal situation. Below is a list of **mandatory** pre-installation requirements that need to be met before we can proceed with install:


- Electrical and water services must be easily accessible for quick isolation in case of emergency.
- 2. Electrical and water services must be installed in locations highlighted in diagram on page 4 to allow room for units.
- 3. Minimum cupboard dimensions must be allowed, including extra height if installing optional safe tray.
- 4. Adequate ventilation must be provided as per page 5.
- 5. Benchtop holes must be cut to specifications on page 6 9 and, where possible, checked with actual parts to be installed.

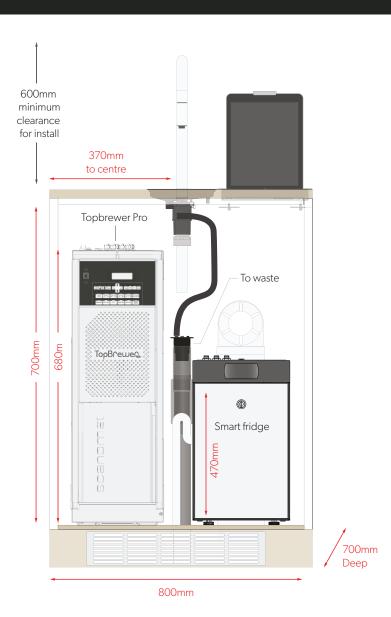

Cupboard Dimensions TopBrewer Pro



- All dimensions listed in red are internal
- Cupboard depth \longrightarrow 700mm
- Water supply and waste line should be installed against back wall of cupboard

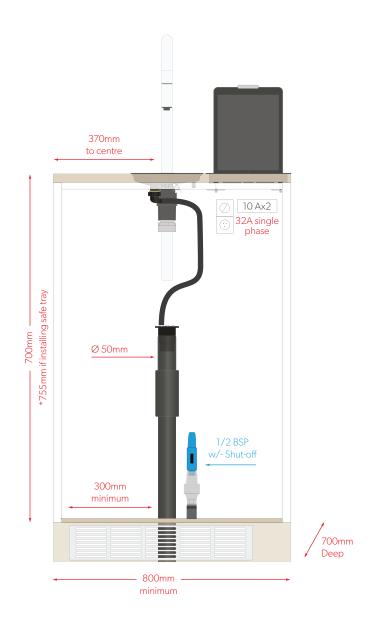

Ventilation TopBrewer Pro



Adequate Ventilation is a requirement for Top Brewer. The equipment generates heat that needs to vent out the cupboards. To enable air circulation, ventilation is required in top and bottom of cupboard.

Scalloping the base cupboard and routing ventilation in the top of the cupboard doors will be adequate ventilation for cool air to be drawn in and hot air to escape up and out.

These cuts MUST always be at the very top of the cupboard


We recommend the routed vents be 300mm – 400mm in length, and 20mm in height. Scalloping should be at least 20mm into the base of the cupboard.





Benchtop Cut-Out Requirements - iPad Standard Holder TopBrewer Pro




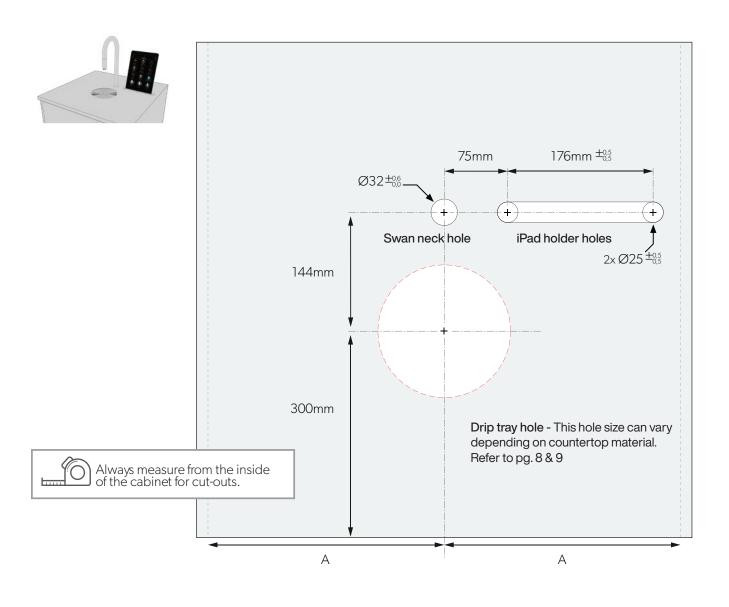

Template
Print on A4 to give actual size of iPad holder holes.
Centre for drip tray/swan neck: 370 mm from left side of inside of cupboard wall

Benchtop Cut-Out Requirements - iPad Deluxe Holder TopBrewer Pro



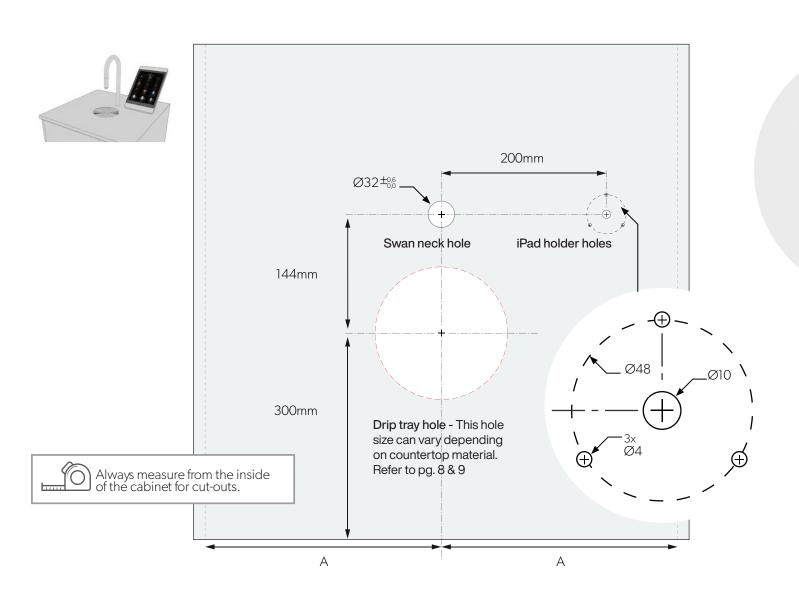



Template
Print on A4 to give actual

size of iPad holder holes. Centre for drip tray/swan neck: 370 mm from left side of inside of cupboard wall

Drip Tray – Flush-Mounted TopBrewer Pro



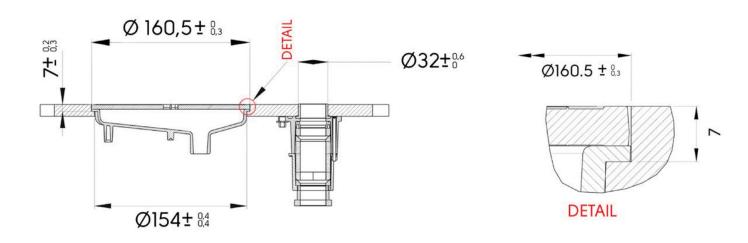

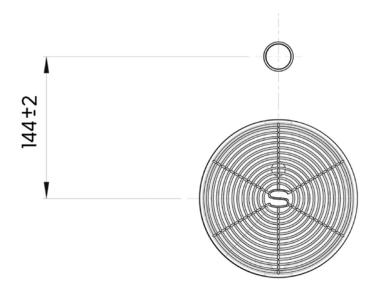



SKU: 2006162


Choose this option for solid materials such as stone, corian, composites and similar.


Alternatively, see page 8 for the Top-Mounted version

Aesthetically the more pleasing solution.

Drip Tray – Top-Mounted TopBrewer Pro



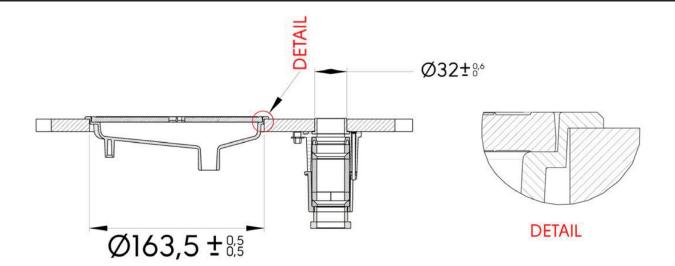

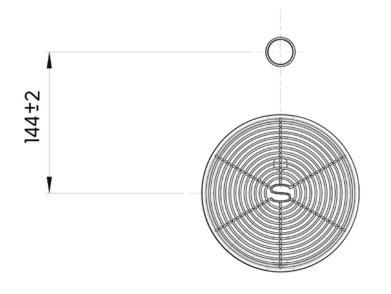



SKU: 2006162a

Choose this option for solid materials such as steel countertops, veneer wood tops, non-solid woods and such.

Alternatively, see page 7 for the Countersunk version.

Easier to cut and to seal for materials with open pores.

Pre-Installation Checklist TopBrewer Pro



	1x 32A, single phase, 3-pin round plug with switch socket
	1 x 10A double GPO
	Within cupboard of machine
	Above the height of fridge as per diagram
	All Electrical must comply with AS/NZS3000
Wat	er Supply
	1x dedicated ½" BSP male fitting with shut off valve
	Water pressure at least 250kPa
	Water system must comply with AS/NZS3500.1
Was	ste
	Vertical Ø50mm waste stack with standard u-bend, p-trap, or inline waterless trap and tun dish
	Wastewater system must comply with AS/NZS3500.2
Cab	inetry
	Internal dimensions of minimum 800mm x 700mm x 700mm (WxDxH), OR:
	Internal dimensions of minimum 800mm x 700mm x 755mm (WxDxH) if installing with optional safe tray
Ven	tilation
	Adequate ventilation provided (see page 5)
Drip	tray cut-out
	Flush-mounted: Ø160.5mm/Ø154mm, countersunk hole (see page 7), OR:
	Top-mounted: Ø163mm hole (see page 8)
Swa	an neck hole
	Ø32mm hole
iPac	I Holder
	Ø20 mm hole for cable + 3 screw holes (see page 6)



Signed off by:

Signature

Name

Date



A beverage revolution on tap.